

**DESIGN  
LUCE**  
**DALÌ**




**DISEGNIAMO CON LA LUCE**



## DATI TECNICI TECHNICAL DATA


	150 cm	200 cm	300 cm
Nominal LED Flux:	↑ 3630 lm - 3630 lm ↓	↑ 4730 lm - 4730 lm ↓	↑ 6820 lm - 6820 lm ↓
Flux Tot:	↑ 2904 lm - 2904 lm ↓	↑ 3784 lm - 3784 lm ↓	↑ 5456 lm - 5456 lm ↓
Output:	110 lm/W	110 lm/W	110 lm/W
CCT:	3000 K	3000 K	3000 K
CRI:	>95	>95	>95
Power:	↑ 33.0W - 33.0W ↓	↑ 43.0W - 43.0W ↓	↑ 62.0W - 62.0W ↓
<b>Power Tot:</b>	<b>66.0W</b>	<b>86.0W</b>	<b>124.0W</b>
Weight:	1.95 Kg	2.70 Kg	3.50 Kg

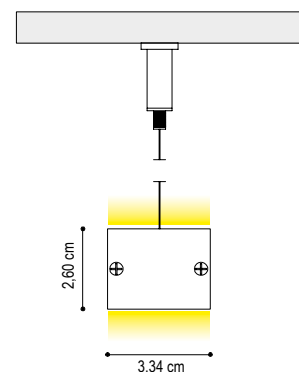


Profilo/Profile: Alluminio/aluminum

Cover: Opale/opal

## MODELLO DI INSTALLAZIONE / INSTALLATION MODEL

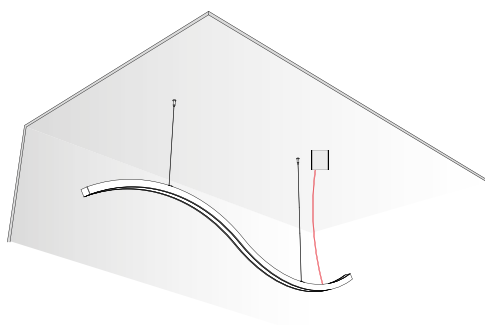

DALÌ CON DRIVER REMOTO  
DALÌ WITH REMOTE DRIVER

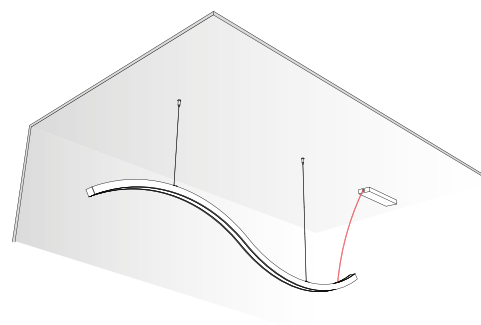

DALÌ CON BOX  
DALÌ WITH POWER SUPPLY BOX

CAVO ALIMENTAZIONE TRASPARENTE : 200 cm / *TRASPARENT ALIMENTATION CABLE : 200cm*  
CAVI SOSPENSIONE IN ACCIAIO : 200 cm / *SUSPENSION CABLES IN STEEL : 200cm*

## FINITURE / FINISHES



## VERNICIATURA A POLVERE / POWDER COATING